


2 GHz High-Speed Amplifier

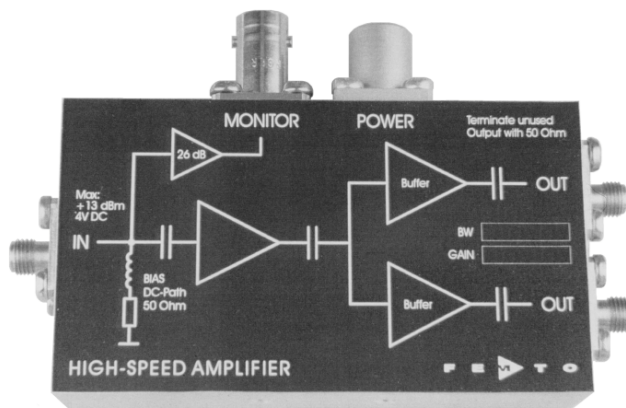


<p>Features</p>	<ul style="list-style-type: none"> • Bandwidth 10 kHz ... 1.9 GHz • Rise Time 185 ps • Gain 40 dB (5 kV/A) • Input VSWR 1 : 1.2 • Integrated Bias Circuit • Monitor Output • Two identical Signal Outputs 																																										
<p>Applications</p>	<ul style="list-style-type: none"> • Preamplifier for ultra-fast Detectors (Microchannel-Plates, Photomultipliers, Avalanche-Photodiodes, PIN-Photodiodes etc.) • Oscilloscope and Transient-Recorder Preamplifier • Time-Resolved Pulse and Transient Measurements 																																										
<p>Block Diagram</p>																																											
<p>Specifications</p>	<table border="0"> <tr> <td></td> <td>Test Conditions</td> <td>$V_s = \pm 15 \text{ V}$, $T_a = 25^\circ\text{C}$, System Impedance = $50 \ \Omega$</td> </tr> <tr> <td>Gain</td> <td>Gain</td> <td>40 dB (5 kV/A)</td> </tr> <tr> <td></td> <td>Gain Accuracy</td> <td>$\pm 1 \text{ dB}$</td> </tr> <tr> <td></td> <td>Gain Flatness</td> <td>$\pm 0.2 \text{ dB}$</td> </tr> <tr> <td>Frequency Response</td> <td>Lower Cut-Off Frequency</td> <td>10 kHz</td> </tr> <tr> <td></td> <td>Upper Cut-Off Frequency</td> <td>1.9 GHz</td> </tr> <tr> <td>Time Response</td> <td>Rise / Fall Time (10% - 90%)</td> <td>185 ps</td> </tr> <tr> <td>Input</td> <td>DC Input Impedance</td> <td>$50 \ \Omega$</td> </tr> <tr> <td></td> <td>RF Input Impedance</td> <td>$50 \ \Omega$</td> </tr> <tr> <td></td> <td>$50 \ \Omega$ Noise Figure</td> <td>4.9 dB (@ $f < 1 \text{ GHz}$)</td> </tr> <tr> <td></td> <td>Equivalent Input Voltage Noise</td> <td>$650 \text{ pV}/\sqrt{\text{Hz}}$ (@ $f < 1 \text{ GHz}$)</td> </tr> <tr> <td></td> <td>Equivalent Input Current Noise</td> <td>$13 \text{ pA}/\sqrt{\text{Hz}}$ (@ $f < 1 \text{ GHz}$)</td> </tr> <tr> <td></td> <td>Input VSWR</td> <td>1 : 1.2 (@ $f < 1.5 \text{ GHz}$)</td> </tr> <tr> <td></td> <td>Maximum Input VSWR</td> <td>1 : 1.45 (@ $f < 3 \text{ GHz}$)</td> </tr> </table>		Test Conditions	$V_s = \pm 15 \text{ V}$, $T_a = 25^\circ\text{C}$, System Impedance = $50 \ \Omega$	Gain	Gain	40 dB (5 kV/A)		Gain Accuracy	$\pm 1 \text{ dB}$		Gain Flatness	$\pm 0.2 \text{ dB}$	Frequency Response	Lower Cut-Off Frequency	10 kHz		Upper Cut-Off Frequency	1.9 GHz	Time Response	Rise / Fall Time (10% - 90%)	185 ps	Input	DC Input Impedance	$50 \ \Omega$		RF Input Impedance	$50 \ \Omega$		$50 \ \Omega$ Noise Figure	4.9 dB (@ $f < 1 \text{ GHz}$)		Equivalent Input Voltage Noise	$650 \text{ pV}/\sqrt{\text{Hz}}$ (@ $f < 1 \text{ GHz}$)		Equivalent Input Current Noise	$13 \text{ pA}/\sqrt{\text{Hz}}$ (@ $f < 1 \text{ GHz}$)		Input VSWR	1 : 1.2 (@ $f < 1.5 \text{ GHz}$)		Maximum Input VSWR	1 : 1.45 (@ $f < 3 \text{ GHz}$)
	Test Conditions	$V_s = \pm 15 \text{ V}$, $T_a = 25^\circ\text{C}$, System Impedance = $50 \ \Omega$																																									
Gain	Gain	40 dB (5 kV/A)																																									
	Gain Accuracy	$\pm 1 \text{ dB}$																																									
	Gain Flatness	$\pm 0.2 \text{ dB}$																																									
Frequency Response	Lower Cut-Off Frequency	10 kHz																																									
	Upper Cut-Off Frequency	1.9 GHz																																									
Time Response	Rise / Fall Time (10% - 90%)	185 ps																																									
Input	DC Input Impedance	$50 \ \Omega$																																									
	RF Input Impedance	$50 \ \Omega$																																									
	$50 \ \Omega$ Noise Figure	4.9 dB (@ $f < 1 \text{ GHz}$)																																									
	Equivalent Input Voltage Noise	$650 \text{ pV}/\sqrt{\text{Hz}}$ (@ $f < 1 \text{ GHz}$)																																									
	Equivalent Input Current Noise	$13 \text{ pA}/\sqrt{\text{Hz}}$ (@ $f < 1 \text{ GHz}$)																																									
	Input VSWR	1 : 1.2 (@ $f < 1.5 \text{ GHz}$)																																									
	Maximum Input VSWR	1 : 1.45 (@ $f < 3 \text{ GHz}$)																																									

2 GHz High-Speed Amplifier

<p>Output</p>	<p>Two identical Signal Outputs:</p> <p>Output Impedance 50 Ω</p> <p>Maximum Output VSWR 1 : 1.8 (@ f < 3 GHz)</p> <p>Output Power P_{1dB} + 12 dBm (@ f < 1 GHz)</p> <p>Output Peak-Peak Voltage 1.7 Vpp (@ f < 500 MHz, for linear Amplification)</p> <p>Isolation between Outputs 20 dB (@ f < 3 GHz)</p>
<p>Monitor Amplifier</p>	<p>Gain 26 dB (1 kV/A)</p> <p>Lower Cut-Off Frequency DC</p> <p>Upper Cut-Off Frequency 100 kHz</p> <p>Output Voltage ± 10 V (@ 10kΩ load)</p>
<p>Power Supply</p>	<p>Supply Voltage ± 15 V</p> <p>Supply Current + 185 / -10 mA</p>
<p>Case</p>	<p>Weight 180 gr. (0.41 lbs)</p> <p>Material AlMg4.5Mn, nickel-plated</p>
<p>Temperature Range</p>	<p>Storage Temperature - 40 ... + 100 °C</p> <p>Operating Ambient Temperature 0 ... + 60 °C</p> <p>Operating Case Temperature 40 °C (@ Ta = 25 °C)</p>
<p>Absolute Maximum Ratings</p>	<p>Power Supply Voltage ± 20 V</p> <p>DC and LF Input Voltage ± 4 V</p> <p>RF Input Power + 13 dBm</p>
<p>Connectors</p>	<p>Input SMA</p> <p>Signal Outputs SMA</p> <p>Monitor Output BNC</p> <p>Power Supply LEMO Series 1S, 3-pin fixed Socket</p> <p>Pin 1: + 15 V</p> <p>Pin 2: - 15 V</p> <p>Pin 3: GND</p> <div data-bbox="874 1467 1141 1630" style="text-align: center;"> </div>

2 GHz High-Speed Amplifier

Dimensions

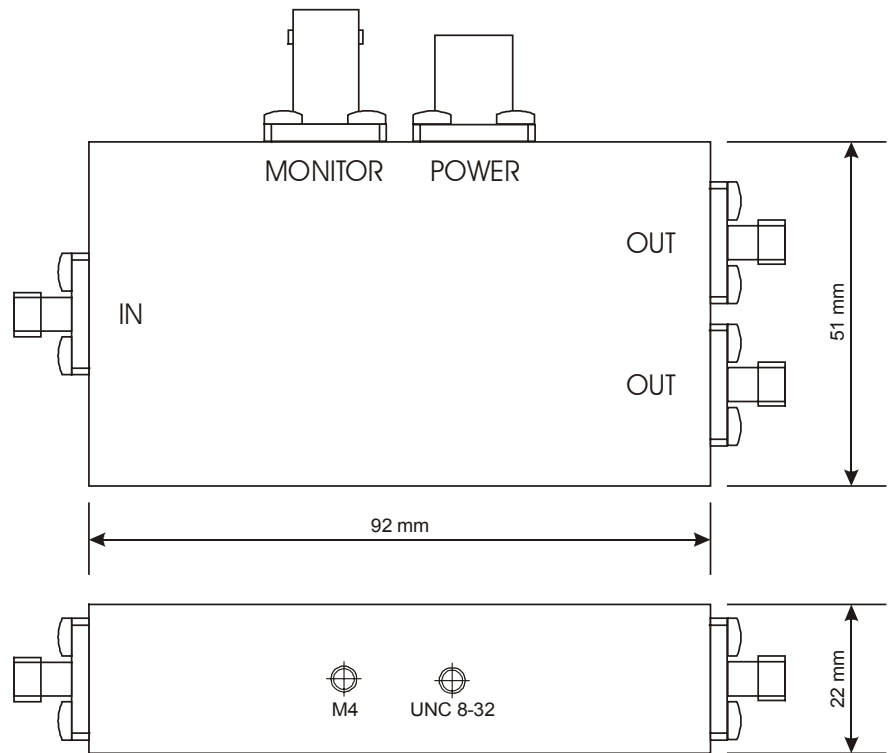

DZ01-0611-10

FEMTO Messtechnik GmbH
 Paul-Lincke-Ufer 34
 D-10999 Berlin · Germany
 Tel.: +49 (0)30 – 4 46 93 86
 Fax: +49 (0)30 – 4 46 93 88
 e-mail: info@femto.de
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH
 Printed in Germany