
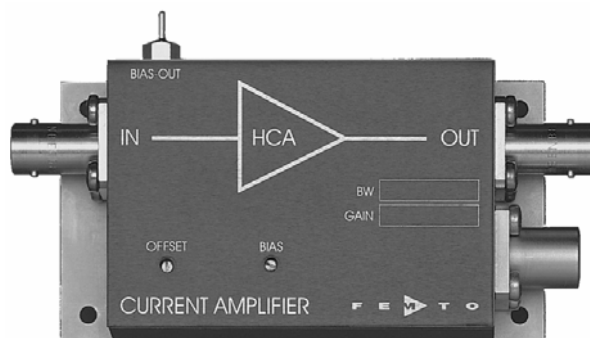



High Speed Current Amplifier

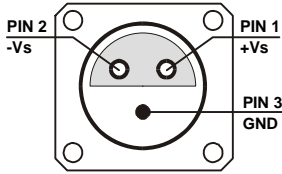

<p>Features</p>	<ul style="list-style-type: none"> • Bandwidth DC ... 100 MHz • Transimpedance (Gain) 5×10^4 V/A • Suitable for High Source Capacitance up to 20 pF • Low Equivalent Input Noise Current of 3.8 pA/√Hz 																																																						
<p>Applications</p>	<ul style="list-style-type: none"> • Photodiode and Photomultiplier Amplifier • Spectroscopy • Charge Amplifier • Ionisation Detectors • Preamplifier for Lock-Ins, A/D Converters, etc. 																																																						
<p>Specifications</p>	<table border="0"> <tr> <td></td> <td><i>Test Conditions</i></td> <td><i>V_s = ± 15 V, T_a = 25°C</i></td> </tr> <tr> <td rowspan="2">Gain</td> <td>Transimpedance</td> <td>5×10^4 V/A (@ 50 Ω load)</td> </tr> <tr> <td>Gain Accuracy</td> <td>± 2 %</td> </tr> <tr> <td rowspan="5">Frequency Response</td> <td>Lower Cut-Off Frequency</td> <td>DC</td> </tr> <tr> <td>Upper Cut-Off Frequency (- 3 dB)</td> <td>100 MHz (± 10 %, @ C_{source} 2 to 10 pF)</td> </tr> <tr> <td></td> <td>80 MHz (± 10 %, @ C_{source} 11 to 20 pF)</td> </tr> <tr> <td>Max. Source Capacitance</td> <td>20 pF (incl. cable, e.g. typical coax cable 1 pF/cm)</td> </tr> <tr> <td>Rise / Fall Time (10 % - 90 %)</td> <td>3.4 ns (@ C_{source} 2 to 10 pF) 4.0 ns (@ C_{source} 11 to 20 pF)</td> </tr> <tr> <td></td> <td>Gain Flatness</td> <td>± 0.3 dB</td> </tr> <tr> <td rowspan="10">Input</td> <td>Equ. Input Noise Current</td> <td>3.8 pA/√Hz (@ 10 MHz)</td> </tr> <tr> <td>Equ. Input Noise Voltage</td> <td>0.9 nV/√Hz (@ 10 MHz)</td> </tr> <tr> <td>Equ. Integrated Noise</td> <td>0.6 μA peak-peak</td> </tr> <tr> <td>Input Bias Current</td> <td>12 μA typ.</td> </tr> <tr> <td>Input Bias Current Drift</td> <td>3 nA / °C</td> </tr> <tr> <td>Offset Current Compensation</td> <td>± 40 μA adjustable by offset trimpot</td> </tr> <tr> <td>Input Current Range</td> <td>± 30 μA (for linear amplification)</td> </tr> <tr> <td>Input Offset Voltage</td> <td>< 1 mV</td> </tr> <tr> <td>DC Input Impedance</td> <td>56 Ω (virtual) // 5 pF</td> </tr> <tr> <td rowspan="3">Output</td> <td>Output Voltage Range</td> <td>± 1.5 V (@ 50 Ω load) for linear operation and low harmonic distortion</td> </tr> <tr> <td>Max. Output Voltage Range</td> <td>± 1.7 V (@ 50 Ω load)</td> </tr> <tr> <td>Output Impedance</td> <td>50 Ω (terminate with 50 Ω load for best performance)</td> </tr> <tr> <td rowspan="2">Bias Output</td> <td>Bias Output Voltage Range</td> <td>± 12 V, adjustable by bias trimpot</td> </tr> <tr> <td>Bias Output Impedance</td> <td>10 kΩ // 1 μF</td> </tr> </table>			<i>Test Conditions</i>	<i>V_s = ± 15 V, T_a = 25°C</i>	Gain	Transimpedance	5×10^4 V/A (@ 50 Ω load)	Gain Accuracy	± 2 %	Frequency Response	Lower Cut-Off Frequency	DC	Upper Cut-Off Frequency (- 3 dB)	100 MHz (± 10 %, @ C _{source} 2 to 10 pF)		80 MHz (± 10 %, @ C _{source} 11 to 20 pF)	Max. Source Capacitance	20 pF (incl. cable, e.g. typical coax cable 1 pF/cm)	Rise / Fall Time (10 % - 90 %)	3.4 ns (@ C _{source} 2 to 10 pF) 4.0 ns (@ C _{source} 11 to 20 pF)		Gain Flatness	± 0.3 dB	Input	Equ. Input Noise Current	3.8 pA/√Hz (@ 10 MHz)	Equ. Input Noise Voltage	0.9 nV/√Hz (@ 10 MHz)	Equ. Integrated Noise	0.6 μA peak-peak	Input Bias Current	12 μA typ.	Input Bias Current Drift	3 nA / °C	Offset Current Compensation	± 40 μA adjustable by offset trimpot	Input Current Range	± 30 μA (for linear amplification)	Input Offset Voltage	< 1 mV	DC Input Impedance	56 Ω (virtual) // 5 pF	Output	Output Voltage Range	± 1.5 V (@ 50 Ω load) for linear operation and low harmonic distortion	Max. Output Voltage Range	± 1.7 V (@ 50 Ω load)	Output Impedance	50 Ω (terminate with 50 Ω load for best performance)	Bias Output	Bias Output Voltage Range	± 12 V, adjustable by bias trimpot	Bias Output Impedance	10 kΩ // 1 μF
	<i>Test Conditions</i>	<i>V_s = ± 15 V, T_a = 25°C</i>																																																					
Gain	Transimpedance	5×10^4 V/A (@ 50 Ω load)																																																					
	Gain Accuracy	± 2 %																																																					
Frequency Response	Lower Cut-Off Frequency	DC																																																					
	Upper Cut-Off Frequency (- 3 dB)	100 MHz (± 10 %, @ C _{source} 2 to 10 pF)																																																					
		80 MHz (± 10 %, @ C _{source} 11 to 20 pF)																																																					
	Max. Source Capacitance	20 pF (incl. cable, e.g. typical coax cable 1 pF/cm)																																																					
	Rise / Fall Time (10 % - 90 %)	3.4 ns (@ C _{source} 2 to 10 pF) 4.0 ns (@ C _{source} 11 to 20 pF)																																																					
	Gain Flatness	± 0.3 dB																																																					
Input	Equ. Input Noise Current	3.8 pA/√Hz (@ 10 MHz)																																																					
	Equ. Input Noise Voltage	0.9 nV/√Hz (@ 10 MHz)																																																					
	Equ. Integrated Noise	0.6 μA peak-peak																																																					
	Input Bias Current	12 μA typ.																																																					
	Input Bias Current Drift	3 nA / °C																																																					
	Offset Current Compensation	± 40 μA adjustable by offset trimpot																																																					
	Input Current Range	± 30 μA (for linear amplification)																																																					
	Input Offset Voltage	< 1 mV																																																					
	DC Input Impedance	56 Ω (virtual) // 5 pF																																																					
	Output	Output Voltage Range	± 1.5 V (@ 50 Ω load) for linear operation and low harmonic distortion																																																				
Max. Output Voltage Range		± 1.7 V (@ 50 Ω load)																																																					
Output Impedance		50 Ω (terminate with 50 Ω load for best performance)																																																					
Bias Output	Bias Output Voltage Range	± 12 V, adjustable by bias trimpot																																																					
	Bias Output Impedance	10 kΩ // 1 μF																																																					

High Speed Current Amplifier


Specifications (continued)	<p>Power Supply</p> <p>Supply Voltage $\pm 15\text{ V}$ Supply Current $\pm 50\text{ mA typ.}$ (depends on operating conditions, recommended power supply capability minimum $\pm 150\text{ mA}$)</p> <p>Case</p> <p>Weight 210 g (0.5 lbs) Material AlMg4.5Mn, nickel-plated</p> <p>Temperature Range</p> <p>Storage Temperature $-40 \dots +100\text{ }^\circ\text{C}$ Operating Temperature $0 \dots +60\text{ }^\circ\text{C}$</p>
Absolute Maximum Ratings	<p>Input Voltage $\pm 5\text{ V}$ Power Supply Voltage $\pm 22\text{ V}$</p>
Connectors	<p>Input BNC Output BNC Power Supply LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND</p> 

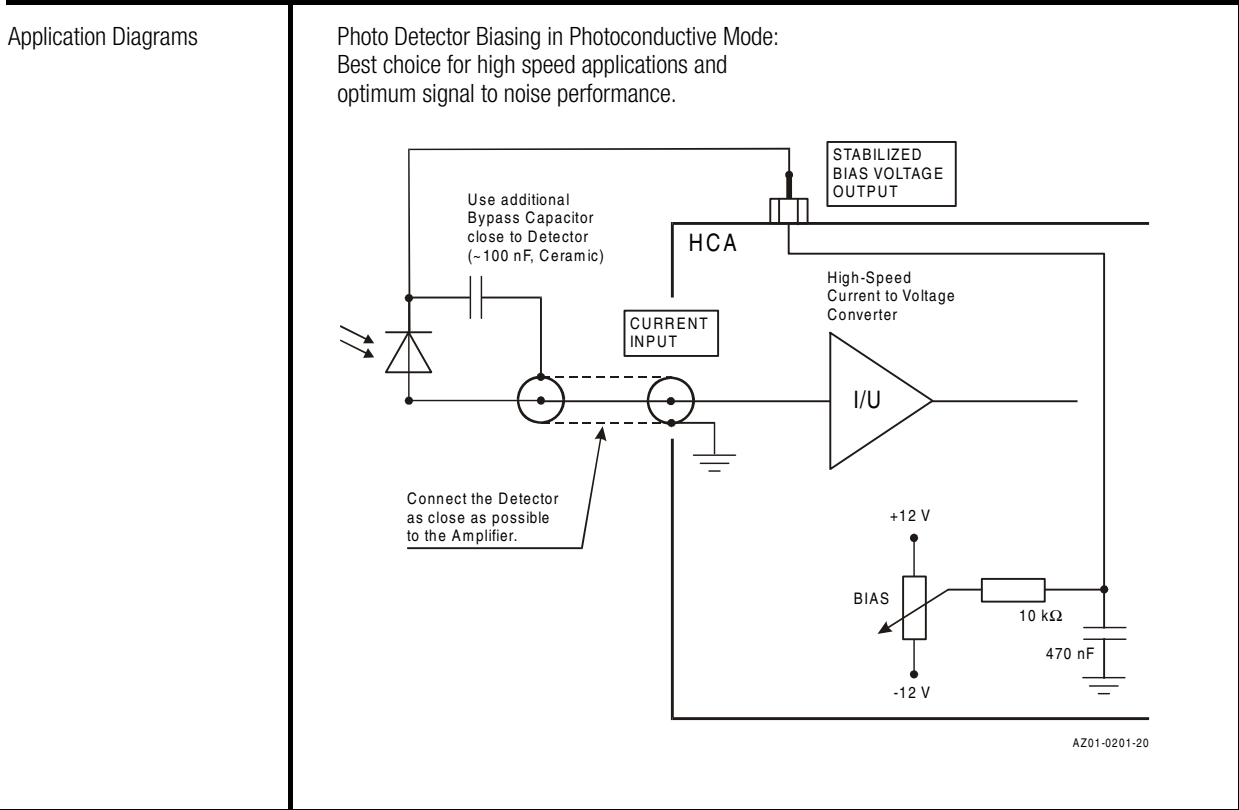


High Speed Current Amplifier

Typical Performance Characteristics

Frequency Response

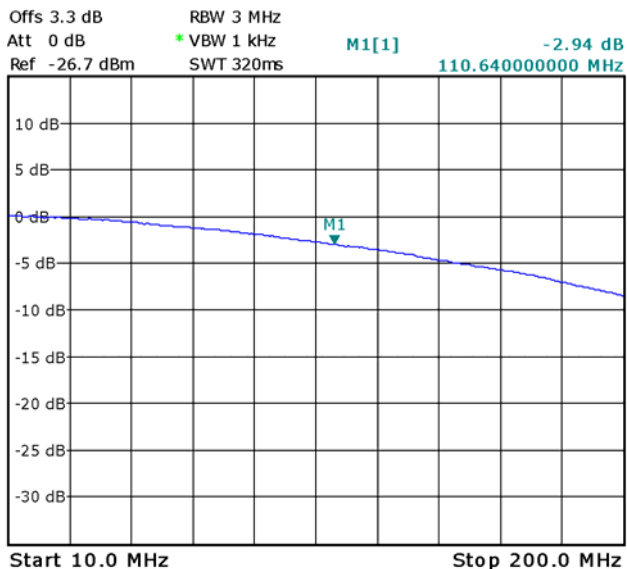

Noise Spectrum

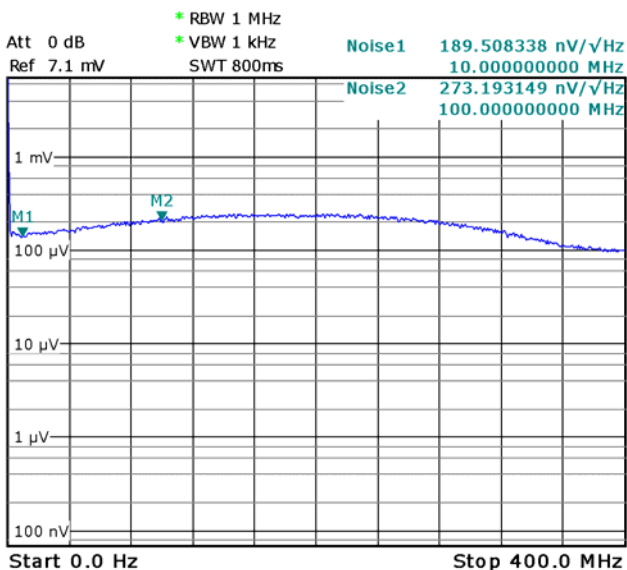


Note: Spectral noise data is measured at the amplifier output with open but shielded input. To determine the spectral input noise divide the measured output noise by the amplifier gain of 5×10^4 V/A, i.e.:

Marker	Frequency	Output Noise	Resulting Input Noise
1	10 MHz	190 nV/√Hz	3.8 pA/√Hz
2	100 MHz	273 nV/√Hz	5.5 pA/√Hz


High Speed Current Amplifier

Typical Performance Characteristics (continued)

Pulse Response to Square Wave Input Signal (with 16 times averaging)

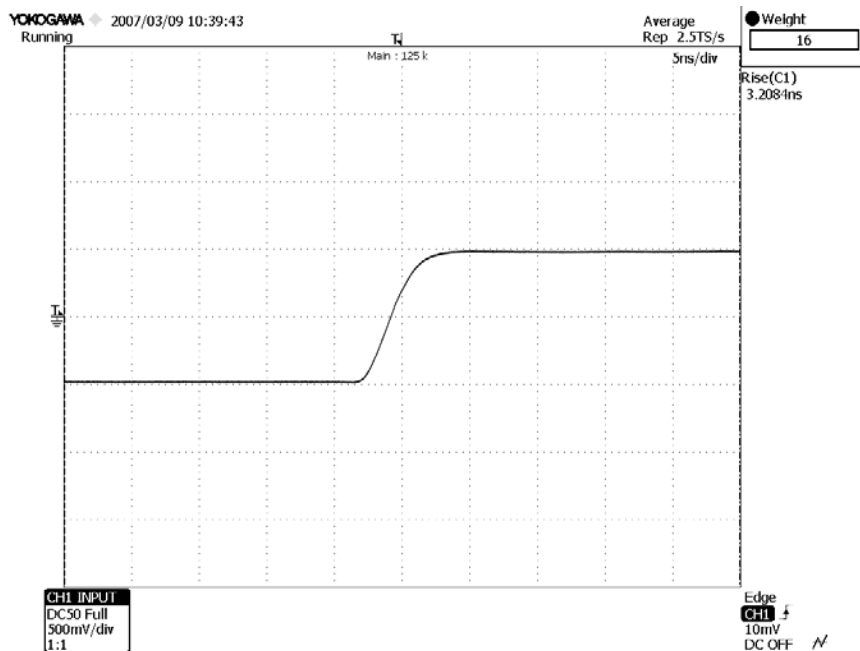



Large Signal Response output signal for 50 MHz, 20 μ A peak-peak input signal (with 4 times averaging)

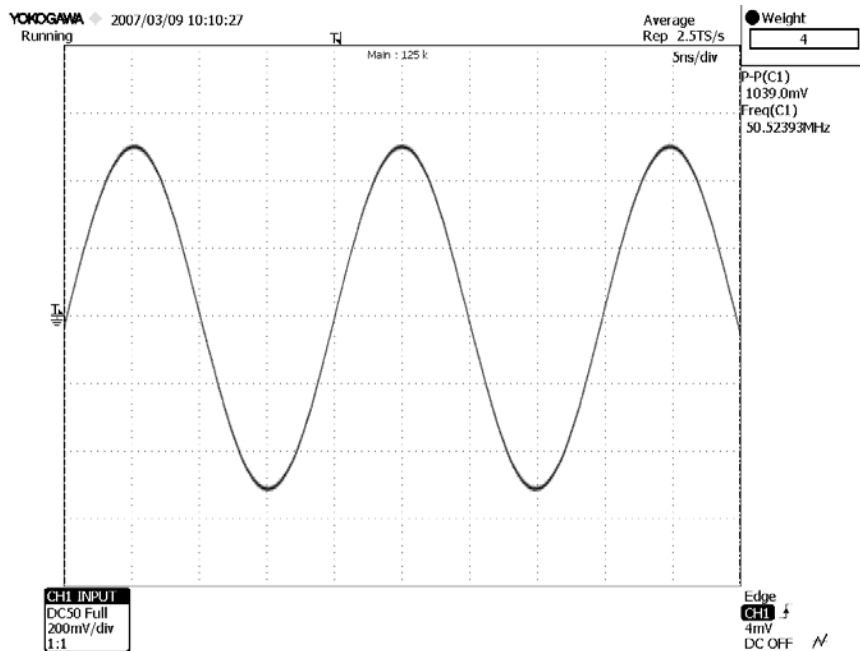

High Speed Current Amplifier


Typical Performance Characteristics (continued)

Small Signal Response
output signal for 1 MHz, 500 nA peak-peak square wave input signal (without (top) and with 64 times averaging (bottom))

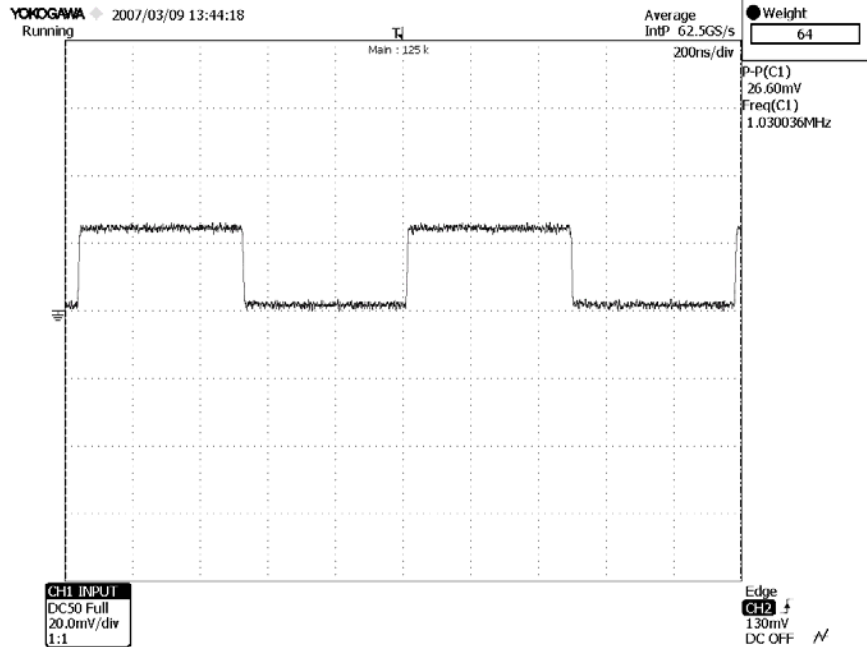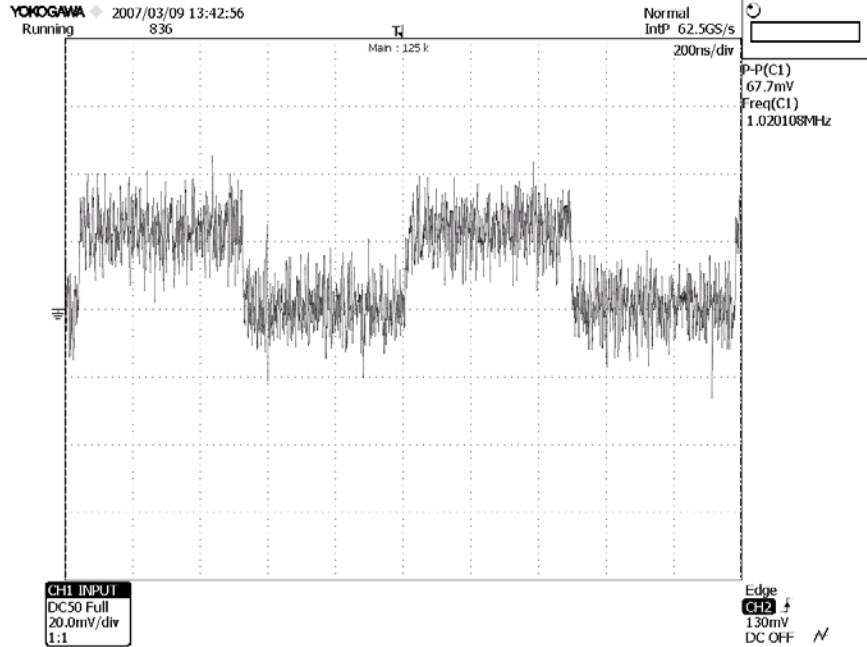

High Speed Current Amplifier

Dimensions

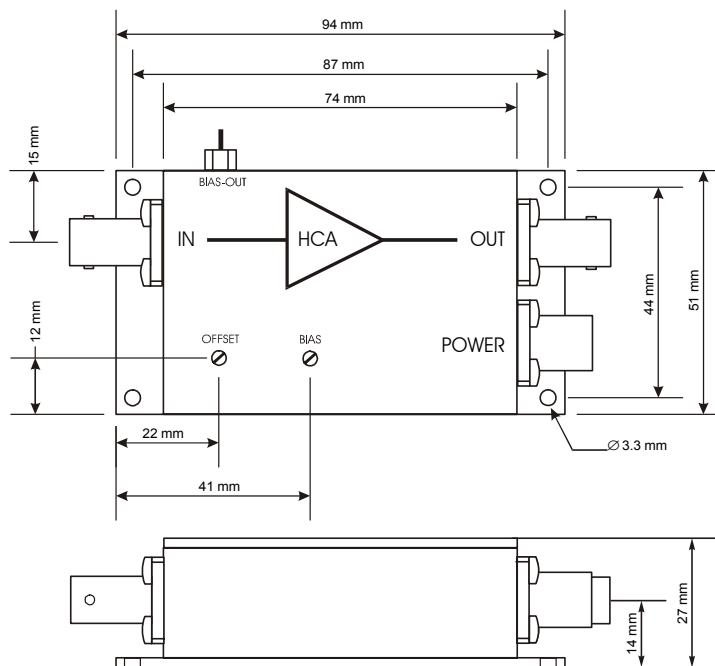

DZ01-0201-22

FEMTO Messtechnik GmbH
 Paul-Lincke-Ufer 34
 D-10999 Berlin · Germany
 Tel.: +49 (0)30 – 4 46 93 86
 Fax: +49 (0)30 – 4 46 93 88
 e-mail: info@femto.de
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
 © by FEMTO Messtechnik GmbH
 Printed in Germany