


High Speed Current Amplifier

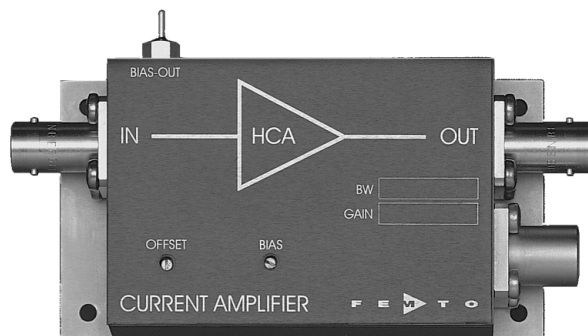

<p>Features</p>	<ul style="list-style-type: none"> • Bandwidth and Frequency Response Independent of Detector Capacitance (up to 500 pF) • Low Noise 3.5 pA/√Hz Equivalent Input Noise Current • Bandwidth DC ... 4 MHz • Transimpedance (Gain) 5 x 10⁵ V/A • Protection against ± 3.5 kV Transients 																			
<p>Applications</p>	<ul style="list-style-type: none"> • Photodiode and Photomultiplier Amplifier • Spectroscopy • Charge Amplifier • Ionisation Detectors • Preamplifier for Lock-Ins, A/D Converters, etc. 																			
<p>Specifications</p>	<table border="0"> <tr> <td style="vertical-align: top;"> <p>Gain</p> </td> <td style="vertical-align: top;"> <p>Test Conditions</p> </td> <td style="vertical-align: top;"> <p>Vs = ± 15 V, Ta = 25°C</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p>Frequency Response</p> </td> <td style="vertical-align: top;"> <p>Transimpedance</p> <p>Gain Accuracy</p> </td> <td style="vertical-align: top;"> <p>5 x 10⁵ V/A (@ 50 Ω load)</p> <p>± 1 %</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p>Input</p> </td> <td style="vertical-align: top;"> <p>Lower Cut-Off Frequency</p> <p>Upper Cut-Off Frequency (- 3 dB)</p> <p>Rise / Fall Time (10 % - 90 %)</p> <p>Gain Flatness</p> </td> <td style="vertical-align: top;"> <p>DC</p> <p>4 MHz</p> <p>90 ns</p> <p>± 0.3 dB</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p>Output</p> </td> <td style="vertical-align: top;"> <p>Equ. Input Noise Current</p> <p>Equ. Input Noise Voltage</p> <p>Input Bias Current</p> <p>Input Bias Current Drift</p> <p>Offset Current Compensation</p> <p>Input Current Range</p> <p>Input Offset Voltage</p> <p>DC Input Impedance</p> </td> <td style="vertical-align: top;"> <p>3.5 pA/√Hz (@ 100 kHz)</p> <p>0.8 nV/√Hz (@ 100 kHz)</p> <p>18 μA typ.</p> <p>0.8 nA / K</p> <p>± 6 μA adjustable by offset trimpot</p> <p>± 3 μA (for linear amplification)</p> <p>3 mV</p> <p>50 Ω (virtual) // 5 pF</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p>Bias Output</p> </td> <td style="vertical-align: top;"> <p>Output Voltage Range</p> <p>Output Impedance</p> </td> <td style="vertical-align: top;"> <p>± 1.5 V (@ 50 Ω load)</p> <p>for linear operation and low harmonic distortion</p> <p>50 Ω (terminate with 50 Ω load for best performance)</p> </td> </tr> <tr> <td></td> <td style="vertical-align: top;"> <p>Bias Output Voltage Range</p> <p>Bias Output Impedance</p> </td> <td style="vertical-align: top;"> <p>± 12 V, adjustable by bias trimpot</p> <p>10 kΩ // 1 μF</p> </td> </tr> </table>		<p>Gain</p>	<p>Test Conditions</p>	<p>Vs = ± 15 V, Ta = 25°C</p>	<p>Frequency Response</p>	<p>Transimpedance</p> <p>Gain Accuracy</p>	<p>5 x 10⁵ V/A (@ 50 Ω load)</p> <p>± 1 %</p>	<p>Input</p>	<p>Lower Cut-Off Frequency</p> <p>Upper Cut-Off Frequency (- 3 dB)</p> <p>Rise / Fall Time (10 % - 90 %)</p> <p>Gain Flatness</p>	<p>DC</p> <p>4 MHz</p> <p>90 ns</p> <p>± 0.3 dB</p>	<p>Output</p>	<p>Equ. Input Noise Current</p> <p>Equ. Input Noise Voltage</p> <p>Input Bias Current</p> <p>Input Bias Current Drift</p> <p>Offset Current Compensation</p> <p>Input Current Range</p> <p>Input Offset Voltage</p> <p>DC Input Impedance</p>	<p>3.5 pA/√Hz (@ 100 kHz)</p> <p>0.8 nV/√Hz (@ 100 kHz)</p> <p>18 μA typ.</p> <p>0.8 nA / K</p> <p>± 6 μA adjustable by offset trimpot</p> <p>± 3 μA (for linear amplification)</p> <p>3 mV</p> <p>50 Ω (virtual) // 5 pF</p>	<p>Bias Output</p>	<p>Output Voltage Range</p> <p>Output Impedance</p>	<p>± 1.5 V (@ 50 Ω load)</p> <p>for linear operation and low harmonic distortion</p> <p>50 Ω (terminate with 50 Ω load for best performance)</p>		<p>Bias Output Voltage Range</p> <p>Bias Output Impedance</p>	<p>± 12 V, adjustable by bias trimpot</p> <p>10 kΩ // 1 μF</p>
<p>Gain</p>	<p>Test Conditions</p>	<p>Vs = ± 15 V, Ta = 25°C</p>																		
<p>Frequency Response</p>	<p>Transimpedance</p> <p>Gain Accuracy</p>	<p>5 x 10⁵ V/A (@ 50 Ω load)</p> <p>± 1 %</p>																		
<p>Input</p>	<p>Lower Cut-Off Frequency</p> <p>Upper Cut-Off Frequency (- 3 dB)</p> <p>Rise / Fall Time (10 % - 90 %)</p> <p>Gain Flatness</p>	<p>DC</p> <p>4 MHz</p> <p>90 ns</p> <p>± 0.3 dB</p>																		
<p>Output</p>	<p>Equ. Input Noise Current</p> <p>Equ. Input Noise Voltage</p> <p>Input Bias Current</p> <p>Input Bias Current Drift</p> <p>Offset Current Compensation</p> <p>Input Current Range</p> <p>Input Offset Voltage</p> <p>DC Input Impedance</p>	<p>3.5 pA/√Hz (@ 100 kHz)</p> <p>0.8 nV/√Hz (@ 100 kHz)</p> <p>18 μA typ.</p> <p>0.8 nA / K</p> <p>± 6 μA adjustable by offset trimpot</p> <p>± 3 μA (for linear amplification)</p> <p>3 mV</p> <p>50 Ω (virtual) // 5 pF</p>																		
<p>Bias Output</p>	<p>Output Voltage Range</p> <p>Output Impedance</p>	<p>± 1.5 V (@ 50 Ω load)</p> <p>for linear operation and low harmonic distortion</p> <p>50 Ω (terminate with 50 Ω load for best performance)</p>																		
	<p>Bias Output Voltage Range</p> <p>Bias Output Impedance</p>	<p>± 12 V, adjustable by bias trimpot</p> <p>10 kΩ // 1 μF</p>																		

High Speed Current Amplifier

Specifications (continued)


Power Supply	Supply Voltage	$\pm 15\text{ V}$
	Supply Current	$\pm 50\text{ mA typ.}$ (depends on operating conditions, recommended power supply capability minimum $\pm 150\text{ mA}$)
Case	Weight	210 g (0.5 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	$-40 \dots +100\text{ }^\circ\text{C}$
	Operating Temperature	$0 \dots +60\text{ }^\circ\text{C}$

Absolute Maximum Ratings

Input Voltage	$\pm 5\text{ V}$
Input Voltage Transient	$\pm 3.5\text{ kV}$ (pulsewidth 10 ns)
Power Supply Voltage	$\pm 22\text{ V}$


Connectors

Input	BNC
Output	BNC
Power Supply	LEMO series 1S, 3-pin fixed socket
	Pin 1: +15V
	Pin 2: -15V
	Pin 3: GND



Application Diagrams


Photo Detector Biasing in Photoconductive Mode:
Best choice for high speed applications and optimum signal to noise performance.

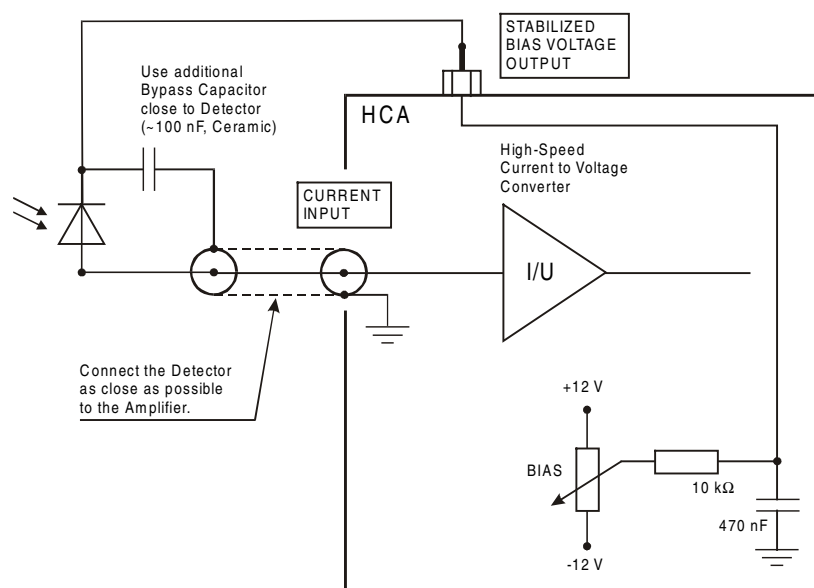

AZ01-0201-20

High Speed Current Amplifier

Dimensions

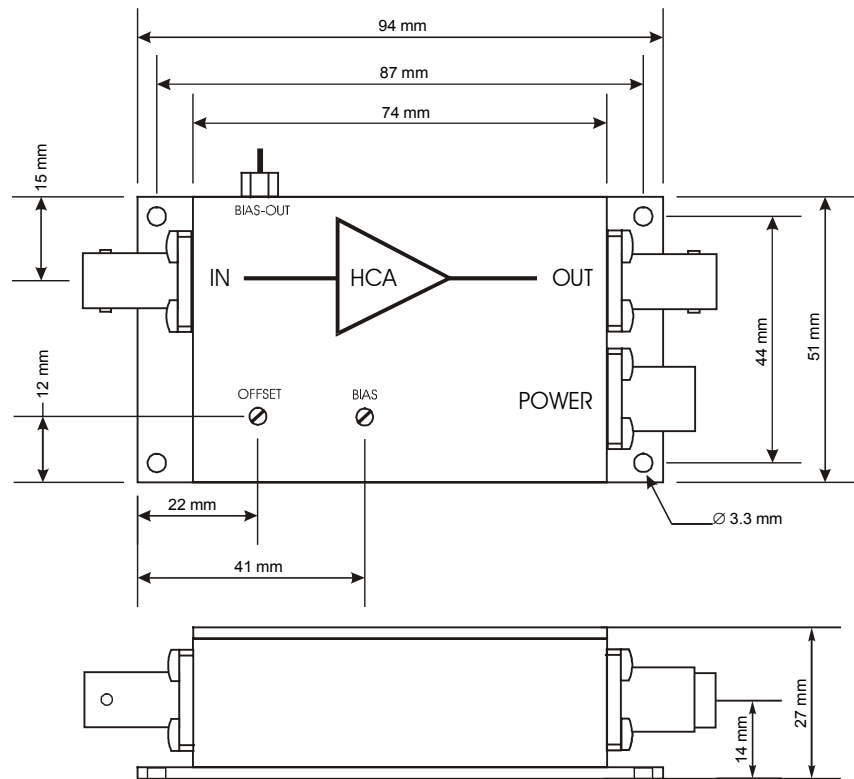

DZ01-0201-22

FEMTO Messtechnik GmbH
 Paul-Lincke-Ufer 34
 D-10999 Berlin · Germany
 Tel.: +49 (0)30 – 4 46 93 86
 Fax: +49 (0)30 – 4 46 93 88
 e-mail: info@femto.de
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH
 Printed in Germany