



Lock-In-Amplifier Module



| | |
|----------------------|--|
| <p>Features</p> | <ul style="list-style-type: none"> • BNC Connectors for Input and Output Signals • Rugged Aluminium Housing • Single Phase Detection with X Output • Working Frequency 50 Hz ... 120 kHz, Digital Phase Shifter 0 ... 360° • Parameter Control by local Switches and opto-isolated digital Inputs • Optional Reference Oscillator Module available |
| <p>Applications</p> | <ul style="list-style-type: none"> • Spectroscopy • Luminescence, Fluorescence, Phosphorescence Measurements • Light Scattering Measurements • Opto-electronical Quality Control |
| <p>Block Diagram</p> | <p>The block diagram illustrates the internal architecture of the LIA-MV-200-H. It features two main signal paths: an AC path and a DC path. The AC path starts with a 'VOLTAGE INPUT' and 'CURRENT INPUT' (via a 'Transimpedance Amplifier' with a gain of -100kV/A). These signals pass through a 'Progr. Gain AC-Amplifier', followed by a 'Lowpass-Filter' (with $f_{lp} = 100\text{Hz} \dots 1\text{MHz} / 6\text{dB}$) and a 'Highpass-Filter' (with $f_{hp} = 2\text{Hz} \dots 10\text{kHz} / 6\text{dB}$), leading to the 'MONITOR-OUTPUT'. The DC path starts with a 'REFERENCE INPUT' passing through a 'Reference Comparator' and a 'Digital Phase-Shifter' (with $\Delta\phi = 0 \dots 360^\circ$). This signal is then processed by a 'PSD' block, followed by another 'Lowpass-Filter' (with $t = 0.3\text{ms} \dots 1\text{s}$ and $6/12 \text{ dB/Oct.}$), and a 'Progr. Gain DC-Amplifier' to produce the 'X-OFFSET INPUT' and 'X-OUTPUT $R \cdot \cos(\phi)$'. The control system includes 'CONTROL INPUTS' (via an 'Optocoupler Isolate Unit') and 'Manual Switches' feeding into a 'Parameter Control Unit'. This unit manages the 'Progr. Gain AC-Amplifier', 'Digital Phase-Shifter', and 'Progr. Gain DC-Amplifier'. It also monitors 'Overload Detector' and 'Unlocked Detector' signals, which are sent to a 'STATUS-OUTPUT'.</p> |

Lock-In-Amplifier Module

| Specifications | <i>Test Conditions</i> | <i>V_s = ± 15 V, T_a = 25°C</i> | | | |
|---|--|---|------------|------------|-------------|
| Voltage Input | Voltage Input Characteristic | True Differential Instrumentation-Amplifier | | | |
| | Voltage Input Range | 3 μV ... 1V in 1-3-10 steps (for Full Scale Output) | | | |
| | Voltage Input Coupling | AC | | | |
| | Voltage Input Impedance | 1 MΩ // 4 pF | | | |
| | Voltage Input Noise | 12 nV/√Hz | | | |
| | Voltage Input CMRR | 110 dB @ 1 kHz, 100 dB @ 10 kHz | | | |
| | Voltage Input Gain Drift | 100 ppm/K | | | |
| Current Input | Current Input Characteristic | Transimpedance-Amplifier, -100 kV/A (inverting) | | | |
| | Current Input Range | 30 pA ... 10 μA in 1-3-10 steps (for Full Scale Output) | | | |
| | Current Input Noise | 0.4 pA/√Hz | | | |
| | Current Input Source- Capacit. | 10 pF – 500 pF (recommended) | | | |
| | Current Input Gain Error vs. Source Capacitance | Cs | f < 20 kHz | f = 50 kHz | f = 100 kHz |
| | | 10 pF | < 1 % | 1 % | 4 % |
| | | 100 pF | < 1 % | 1 % | 3 % |
| | 500 pF | < 1 % | 4 % | 3 % | |
| Signal Filter (without optional Bandpass-Module) | Signal Filter Lowpass (-3 dB BW) | 1 MHz, 100 kHz, 10 kHz, 1 kHz, 100 Hz; 6 dB/Oct. selectable per jumper | | | |
| | Signal Filter Highpass (-3 dB BW) | 2 Hz, 10 Hz, 100 Hz, 1 kHz, 10 kHz; 6 dB/Oct. selectable per jumper | | | |
| | Signal Filter Cutoff accuracy | ± 20 % | | | |
| | Max. Dynamic Reserve | 80 dB | | | |
| Signal Monitor Output | Signal Monitor Output Gain | 1 ... 3333 (depends on Gain-Setting) | | | |
| | Signal Monitor Output Voltage | ± 8 V max. | | | |
| | Signal Monitor Output Impedance | 100 Ω | | | |
| | Signal Monitor Output Current | ± 10 mA max. | | | |
| Note | When using Current Input with low Input Ranges, the Monitor Output may be disabled by opening the soldering jumper at the Board (near JP1) to prevent from recoupling. | | | | |
| Demodulator | Demodulator Dynamic Reserve | 15 dB @ Ultra Stable Setting 35 dB @ Low Drift Setting 55 dB @ High Dynamic Setting | | | |
| Reference Input | Reference Input Voltage Range | ± 100 mV ... ± 5 V @ bip. Mode (0 V Comparator Threshold) - 5 V / +10 V @ TTL Mode (+2 V Comparator Threshold) | | | |
| | Reference Input Impedance | 1 MΩ | | | |
| | Reference Acquisition Time | max. 2 s @ Fast Setting max. 4 s @ Slow Setting | | | |
| Phase Shifter | Phase Shifter Type | Digital, Working Frequency 50 Hz ... 120 kHz | | | |
| | Phase Shifter Range | 0 ... + 360 ° | | | |
| | Phase Shifter Resolution | 1.4 ° @ f < 60 kHz, 2.8 ° @ f > 60 kHz | | | |
| | Phase Shifter Drift | < 100 ppm/K | | | |
| | Phase Shifter Accuracy | < 0.3 ° | | | |
| Time Constants | Time Constant Range | 300 μs ... 1 s in 1-3-10 steps | | | |
| | Time Const. Filter Characteristic | 6 dB/Oct. or 12 dB/Oct. Switchable | | | |

Lock-In-Amplifier Module

| Specifications (continued) Output | Output Channels Output Voltage Range Output Current Output Impedance Output DC-Stability Output Basic Accuracy Output Voltage Offset Range Output Voltage Offset Control- Output Load Impedance | X = In Phase $\pm 10\text{ V}$ (@ $2\text{ k}\Omega$ Load) $\pm 5\text{ mA}$ max. $50\ \Omega$ 5 ppm/K @ Ultra Stable Setting 50 ppm/K @ Low Drift Setting 500 ppm/K @ High Dynamic Setting 2 % @ sinusoidal input signal $\pm 100\%$ Full Scale by $\pm 10\text{ V}$ Control Voltage $> 2\text{ k}\Omega$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|---|---|--------------|------------|----|----|--------------------------|--------------------------|----|----------|----------|----|------------------|------------------|----|-------------------------------------|--------------------------------------|--|---------|--------------|--------------|--------------|----|-----|------|-----------|-----|--------|--------|--------------|------|------|-----|
| Status Indicator LED | Functions | Amplifier Overload Status Reference PLL Unlocked Status | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Digital Control | Control Input Voltage Control Input Current Digital Status Output Voltage Digital Status Output Current | Low: $-0.8\text{ V} \dots +0.8\text{ V}$, High: $+1.8\text{ V} \dots +12\text{ V}$ 0 mA @ 0V, 1.5 mA @ +5 V, 4.5 mA @ +12V typ. Active: $+4.5\text{ V}$ typ., Non Active: 0 V typ. 10 mA max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power Supply | Supply Voltage Supply Current | $\pm 15\text{ Vdc} \dots \pm 18\text{ Vdc}$ - 60 mA, + 120 mA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Case | Material Dimension Weight | Aluminium anodized 64,4 x 105,0 x 223,0 mm (without BNC-connectors) 1000 gr. (2.2 lbs) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Temperature Range | Storage Temperature Operating Temperature | - 40 ... + 100 °C 0 ... + 60 °C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Absolute Maximum Ratings | Signal Input AC Voltage Reference Input Voltage Control Input Voltage Power Supply Voltage | 50 Vpp $\pm 15\text{ V}$ - 5 V, + 30 V $\pm 22\text{ V}$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Switch Settings | 4 Dip Switch - Presettings Sensitivity Setting, Output DC-Gain Modes | <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;"></th> <th style="width: 40%; text-align: center;">Switch OFF</th> <th style="width: 50%; text-align: center;">ON</th> </tr> </thead> <tbody> <tr> <td>S1</td> <td>Low Drift & High Dynamic</td> <td>Ultra Stable & Low Drift</td> </tr> <tr> <td>S2</td> <td>1-f Mode</td> <td>2-f Mode</td> </tr> <tr> <td>S3</td> <td>Fast PLL-Locking</td> <td>Slow PLL-Locking</td> </tr> <tr> <td>S4</td> <td>Reference-Input- Threshold = 0 V</td> <td>Reference-Input- Threshold = +2 V</td> </tr> </tbody> </table> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;"></th> <th style="width: 20%; text-align: center;">DC-Gain</th> <th style="width: 20%; text-align: center;">Dyn. Reserve</th> <th style="width: 45%; text-align: center;">DC-Stability</th> </tr> </thead> <tbody> <tr> <td>Ultra Stable</td> <td style="text-align: center;">10</td> <td style="text-align: center;">Low</td> <td style="text-align: center;">High</td> </tr> <tr> <td>Low Drift</td> <td style="text-align: center;">100</td> <td style="text-align: center;">Medium</td> <td style="text-align: center;">Medium</td> </tr> <tr> <td>High Dynamic</td> <td style="text-align: center;">1000</td> <td style="text-align: center;">High</td> <td style="text-align: center;">Low</td> </tr> </tbody> </table> <p style="font-size: small; margin-top: 10px;">If only low dynamic reserve is required, select the higher DC-Stability settings. Use Dip switch S1 to preselect either the two upper or the two lower DC-Gain modes, then select best mode by Sensitivity switch settings 0–7 or 8–F.</p> | | Switch OFF | ON | S1 | Low Drift & High Dynamic | Ultra Stable & Low Drift | S2 | 1-f Mode | 2-f Mode | S3 | Fast PLL-Locking | Slow PLL-Locking | S4 | Reference-Input- Threshold = 0 V | Reference-Input- Threshold = +2 V | | DC-Gain | Dyn. Reserve | DC-Stability | Ultra Stable | 10 | Low | High | Low Drift | 100 | Medium | Medium | High Dynamic | 1000 | High | Low |
| | Switch OFF | ON | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S1 | Low Drift & High Dynamic | Ultra Stable & Low Drift | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S2 | 1-f Mode | 2-f Mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S3 | Fast PLL-Locking | Slow PLL-Locking | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S4 | Reference-Input- Threshold = 0 V | Reference-Input- Threshold = +2 V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | DC-Gain | Dyn. Reserve | DC-Stability | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Ultra Stable | 10 | Low | High | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Low Drift | 100 | Medium | Medium | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| High Dynamic | 1000 | High | Low | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Lock-In-Amplifier Module

Switch Settings (continued)

S1 = ON: Sensitivity Setting
for Full Scale (= 10 V Output)

Ultra Stable Mode

| Setting | Voltage | Current |
|---------|-------------|------------|
| 0 | 1 V | 10 μ A |
| 1 | 300 mV | 3 μ A |
| 2 | 100 mV | 1 μ A |
| 3 | 30 mV | 300 nA |
| 4 | 10 mV | 100 nA |
| 5 | 3 mV | 30 nA |
| 6 | 1 mV | 10 nA |
| 7 | 300 μ V | 3 nA |

Low Drift Mode

| Setting | Voltage | Current |
|---------|-------------|-----------|
| 8 | 100 mV | 1 μ A |
| 9 | 30 mV | 300 nA |
| A | 10 mV | 100 nA |
| B | 3 mV | 30 nA |
| C | 1 mV | 10 nA |
| D | 300 μ V | 3 nA |
| E | 100 μ V | 1 nA |
| F | 30 μ V | 300 pA |

S1 = OFF: Sensitivity Setting
for Full Scale (= 10 V Output)

Low Drift Mode

| Setting | Voltage | Current |
|---------|-------------|-----------|
| 0 | 100 mV | 1 μ A |
| 1 | 30 mV | 300 nA |
| 2 | 10 mV | 100 nA |
| 3 | 3 mV | 30 nA |
| 4 | 1 mV | 10 nA |
| 5 | 300 μ V | 3 nA |
| 6 | 100 μ V | 1 nA |
| 7 | 30 μ V | 300 pA |

High Dynamic Mode

| Setting | Voltage | Current |
|---------|-------------|---------|
| 8 | 10 mV | 100 nA |
| 9 | 3 mV | 30 nA |
| A | 1 mV | 10 nA |
| B | 300 μ V | 3 nA |
| C | 100 μ V | 1 nA |
| D | 30 μ V | 300 pA |
| E | 10 μ V | 100 pA |
| F | 3 μ V | 30 pA |


Time Constant Setting

6 dB/Oct. 12 dB/Oct. Time Constant

| | | |
|---|---|-------------|
| 0 | 8 | 300 μ s |
| 1 | 9 | 1 ms |
| 2 | A | 3 ms |
| 3 | B | 10 ms |
| 4 | C | 30 ms |
| 5 | D | 100 ms |
| 6 | E | 300 ms |
| 7 | F | 1 s |

Phase Shift Setting

Phase shift is adjusted by 2 phase switches with 8 Bit resolution. Values 0 ... 255 (Hex 00 ... FF) correspond to phase shift setting 0 ... +360°. One step with switch marked "Coarse" changes phase shift by 22.5°. The "Fine"-switch changes phase shift by 1.4° - steps:

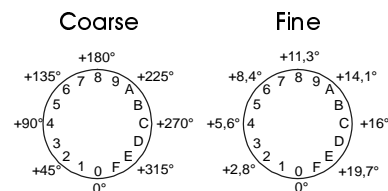

If Frequency Range $f > 70$ kHz or 2-f Mode is selected, the resolution of digital phase control changes to 2.8° and the phase shift range doubles to 0 ... +720°.

Lock-In-Amplifier Module

Internal Jumper Settings (jumpers are accessible when top of case is removed)

Input Signal Filter Setting

Set Cut-Off Frequency of Input Lowpass Filter with JP1 + JP2 (always same position) and Highpass Filter with JP3:

| JP3 | Highpass | JP1, JP2 | Lowpass |
|-------|---------------|----------|---------------|
| | -3 dB Cut-Off | | -3 dB Cut-Off |
| 3 - 4 | 2 Hz | 1 - 2 | 100 Hz |
| 1 - 3 | 10 Hz | 3 - 4 | 1 kHz |
| 2 - 4 | 100 Hz | 5 - 6 | 10 kHz |
| 3 - 5 | 1 kHz | 7 - 8 | 100 kHz |
| 4 - 6 | 10 kHz | none | 1 MHz * |


* (At Sensitivity Settings 6,7 & E,F max. 200 kHz)

Frequency Range Selection

| JP4 | Frequency Range |
|---------------|-----------------------|
| 1 - 2 | f < 60 kHz |
| 3 - 4 & 5 - 6 | f > 60 kHz |
| 7, 8 | test pins, do not use |

(if 2-f mode is used, position is always 1-2)

Internal Jumper Position Diagram (look at top of board when case is opened)

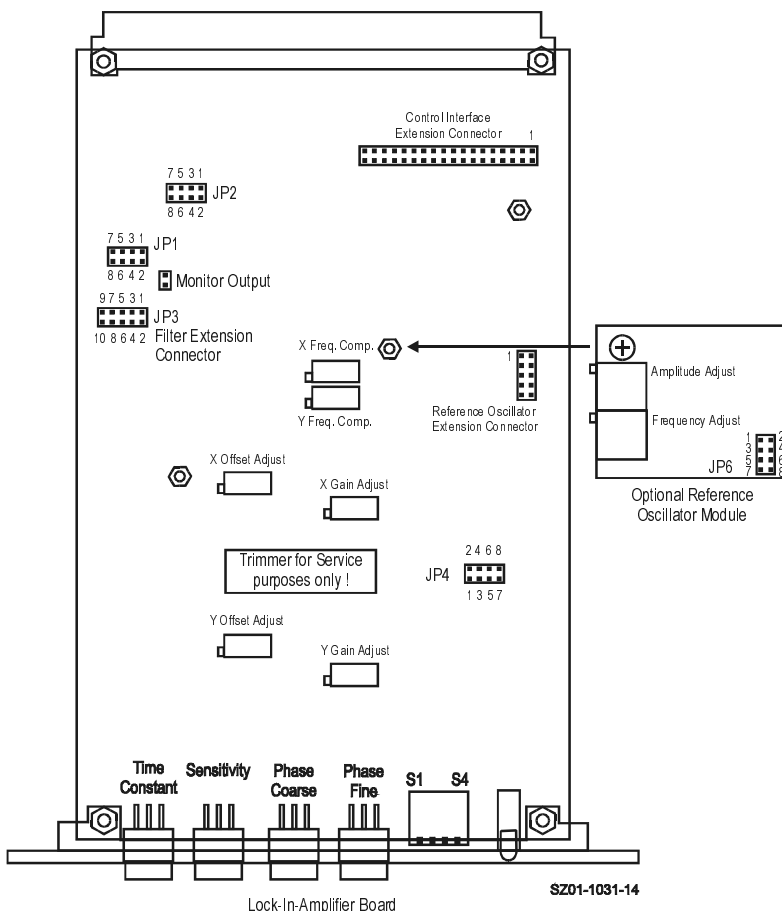


Lock-In-Amplifier Module

Internal Connector
(of build-in Lock-In Board)

| | |
|---|--|
| Connector Type | Euro-Card DIN 41612 Connector, 64 pin male, (a+c) |
| Input | Pin C2: Voltage Input, Non Inverting, DC-Coupled Pin C3: Voltage Input, Non Inverting, AC-Coupled Pin C4: Voltage Input, Inverting, AC-Coupled Pin C5: Voltage Input, Inverting, DC-Coupled Pin C7: Current Input Pin C6: Current Amplifier Voltage Output Pin A2- A6: Input GND |
| Monitor Output | Pin C9: Monitor Output Pin A9: Monitor GND |
| Output | Pin C14: X-Signal Output Pin C15: Output GND |
| Offset Input | Pin A10: X-Offset Input Pin A13: Offset GND |
| Status Output | Pin C10: Unlocked Status Output Pin C11: Overload Status Output Pin C17: Status Output GND (=Power Supply GND) |
| Power Supply | Pin A16+C16: Power Supply – 15V Pin A18+C18: Power Supply + 15V Pin A17+C17: Power Supply GND |
| Remote Control Inputs (Opto-Isolated) | Pin C19: Time Constant (TC0) Pin A19: Time Constant (TC1) Pin C20: Time Constant (TC2) Pin A20: Time Constant Slope (TCSL) Pin A22: Sensitivity (SEN0) Pin C21: Sensitivity (SEN1) Pin A21: Sensitivity (SEN2) Pin C22: Dynamic Mode (DYN0) Pin A28: Phase Shift (PH0) Pin C28: Phase Shift (PH1) Pin A27: Phase Shift (PH2) Pin C27: Phase Shift (PH3) Pin A26: Phase Shift (PH4) Pin C26: Phase Shift (PH5) Pin A25: Phase Shift (PH6) Pin C25: Phase Shift (PH7) Pin C24: Disable Local Switch Control Pin A23+A24: Remote Control GND (Common Optocoupler Cathode) |
| Reference Input | Pin A32: Reference Input Pin A31: Reference Input Ground |
| Reference Output (Connected only if optional Oscillator Module is installed) | Pin A30: Reference Output Pin A17: Refer. Output GND (=Power Supply GND) Pin A29: Reference Synchronization Input |
| Standard Control Interface (Connected only if optional Control Interface Module (future product) is installed) | Pin C29: Interface 0 Pin C30: Interface 1 Pin C31: Interface 2 Pin C32: Interface 3 |

Lock-In-Amplifier Module

External Connectors
(at backside, Standard
Configuration)

| | |
|-----------------|---|
| Signal Input | Factory set to BNC, isolated (single ended) |
| X-Output | BNC |
| Reference Input | BNC |
| Power Supply | LEMO Series 1S, 3-pin fixed Socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND |
| |  |
| Control Port | Sub-D 25-pin, female, Qual. Class 2 Pin 1: +12V (Stabilized Power Supply Output) Pin 2: -12V (Stabilized Power Supply Output) Pin 3: AGND (Analog Ground) Pin 4: +5V (Stabilized Power Supply Output) Pin 5: X-Output Pin 6: Overload Status Output Pin 7: Unlocked Status Output Pin 8: Disable Local Switch Control Input Pin 9: DGND (Ground f. Digital Control Pin 8 - 25) Pin 10: Dynamic Mode (DYN0) Pin 11: Sensitivity (SEN0) Pin 12: Sensitivity (SEN1) Pin 13: Sensitivity (SEN2) Pin 14: Time Constant Slope (TCSL) Pin 15: Time Constant (TC0) Pin 16: Time Constant (TC1) Pin 17: Time Constant (TC2) Pin 18: Phase Shift (PH0) Pin 19: Phase Shift (PH1) Pin 20: Phase Shift (PH2) Pin 21: Phase Shift (PH3) Pin 22: Phase Shift (PH4) Pin 23: Phase Shift (PH5) Pin 24: Phase Shift (PH6) Pin 25: Phase Shift (PH7) |

Connector Wiring Options

General

The BNC-connector configuration can be easily changed by setting electrical jumpers at the internal I/O-adapter card. Disconnect the power supply and open the case by loosening the two upper screws at the case front and rear side. Please pay attention to the ground connection at the backplane. Now open the case by lifting the top. The jumper options and functions are described in the following table.

Lock-In-Amplifier Module

Connector Wiring Options,
Jumpers on internal
Adapter Board

| Input Connectors (JP1) | Input wiring | Jumper installed |
|--|---|---|
| | IN A = Voltage Input (Single Ended, AC) | " +V-IN → IN A" " GND → IN A/SHLD" " -V-IN → IN A/SHLD" |
| | IN A = Voltage Input (Differential, AC) | " +V-IN → IN A" " -V-IN → IN A/SHLD" |
| | IN A / IN B = Voltage Input (2 BNC Differential, AC) (OUT A cannot be used) | " +V-IN → IN A" " GND → IN A/SHLD" " -V-IN → IN B" |
| | IN A = Current Input (Single Ended) | " C-IN → IN A" " GND → IN A/SHLD" " -V-IN → C-OUT" |
| Output Connectors (JP2) | Output wiring | Jumper installed |
| | OUT A = X-Output | " X → OUT A" (JP1) "USE OUT A/NO IN B" |
| | OUT B = X-Output | " X → OUT B" |
| | OUT A = Y-Output | " Y → OUT A" (JP1) "USE OUT A/NO IN B" |
| | OUT B = Y-Output | " Y → OUT B" |
| | OUT C = Y-Output | " Y → OUT C" |
| | OUT A = R-Output | " R → OUT A" (JP1) "USE OUT A/NO IN B" |
| | OUT B = R-Output | " R → OUT B" |
| | OUT C = R-Output | " R → OUT C" |
| | OUT B = Monitor Output | " MON → OUT B" |
| | OUT C = Monitor Output | " MON → OUT C" |
| | OUT B = Unlocked Output | " UNL → OUT B" |
| | OUT C = Unlocked Output | " UNL → OUT C" |
| | OUT B = Overload Output | " OVL → OUT B" |
| | OUT C = Overload Output | " OVL → OUT C" |
| | OUT C = Reference Output | " REF-OUT → OUT C" |
| Reference Connector (JP3) | Reference wiring | Jumper installed |
| | REF = Reference Input | " REF-IN → REF" (2 Jumper) |
| (Reference Output only if optional Oscillator Module is installed) | REF = Reference Output (Reference Output connected to Ref. Input) | " REF-OUT → REF-IN" (2 Jp.) " REF-IN → REF" (2 Jumper) |
| | REF = Refer. Sync. Input (use OUT C as Reference Output) | " REF-SYNC → REF" (2 Jp.) |

Lock-In-Amplifier Module

Remote Control Operation

General

Remote Control Input Bits are opto-isolated and connected by logical OR to local switch setting. The 4 hexadecimal switches are 4 Bit-coded as shown in the following table:

| Switch Code | MSB | | | LSB |
|-------------|-------|-------|-------|-------|
| | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
| 0 | Low | Low | Low | Low |
| 1 | Low | Low | Low | High |
| 2 | Low | Low | High | Low |
| 3 | Low | Low | High | High |
| 4 | Low | High | Low | Low |
| 5 | Low | High | Low | High |
| 6 | Low | High | High | Low |
| 7 | Low | High | High | High |
| 8 | High | Low | Low | Low |
| 9 | High | Low | Low | High |
| A | High | Low | High | Low |
| B | High | Low | High | High |
| C | High | High | Low | Low |
| D | High | High | Low | High |
| E | High | High | High | Low |
| F | High | High | High | High |

For remote control a switch setting, set the local switch to "0" and select the wanted setting via the 4-Bit-code at the corresponding digital inputs.

Sensitivity Switch -
Corresponding Inputs

| Bit | Corresponding Control Port Input | |
|-------|----------------------------------|-----------|
| Bit 0 | SEN0 | (Pin A22) |
| Bit 1 | SEN1 | (Pin C21) |
| Bit 2 | SEN2 | (Pin A21) |
| Bit 3 | DYN0 | (Pin C22) |

Time Constant Switch -
Corresponding Inputs

| Bit | Corresponding Control Port Input | |
|-------|----------------------------------|-----------|
| Bit 0 | TC0 | (Pin C19) |
| Bit 1 | TC1 | (Pin A19) |
| Bit 2 | TC2 | (Pin C20) |
| Bit 3 | TCSL | (Pin A20) |

Phase Switch Coarse -
Corresponding Inputs

| Bit | Corresponding Control Port Input | |
|-------|----------------------------------|-----------|
| Bit 0 | PH4 | (Pin A26) |
| Bit 1 | PH5 | (Pin C26) |
| Bit 2 | PH6 | (Pin A25) |
| Bit 3 | PH7 | (Pin C25) |

Phase Switch Fine -
Corresponding Inputs

| Bit | Corresponding Control Port Input | |
|-------|----------------------------------|-----------|
| Bit 0 | PH0 | (Pin A28) |
| Bit 1 | PH1 | (Pin C28) |
| Bit 2 | PH2 | (Pin A27) |
| Bit 3 | PH3 | (Pin C27) |


Remote Control Example

For example, to select a switch setting code "6", you have to connect a "High" - level signal to the corresponding control input pins Bit 1 & Bit 2. Mixed operation, e.g. local phase settings and remote controlled sensitivity setting, is also possible.


Lock-In-Amplifier Module

Dimensions


Top View

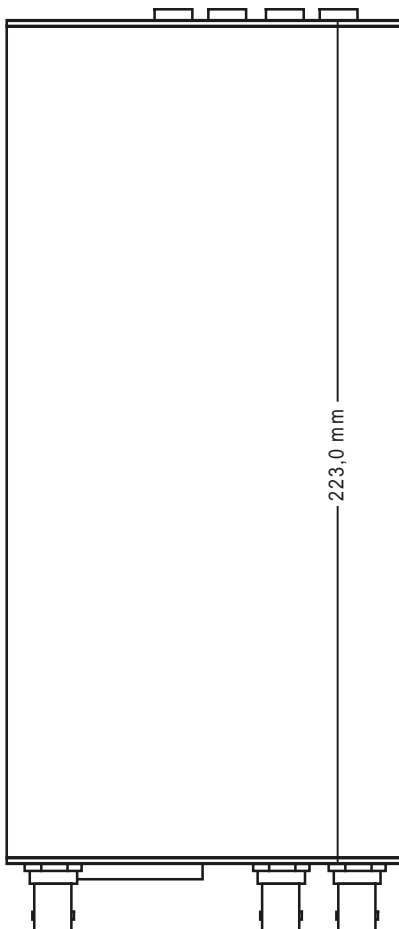

Front View

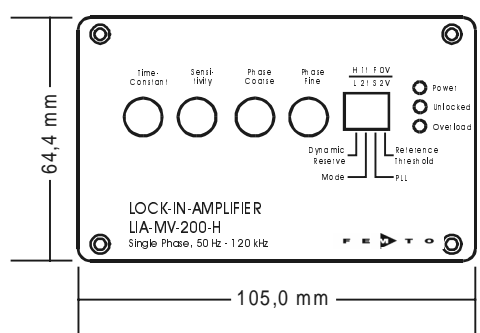

Back View

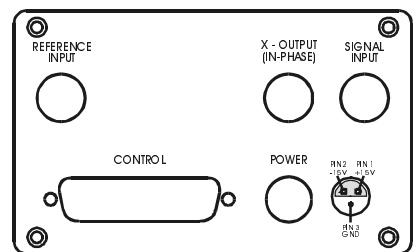

Case Material:
Al, natural anodised

DZ01-1072-10

Optional Extensions

Reference Oscillator Module

Model No.: SOM-1

- Frequency Range 5 Hz ... 130 kHz, User adjustable
- Output Voltage 0 ... 2 Vrms, User adjustable
- 100 ppm/K Amplitude Accuracy

Factory Set

1 kHz, 1 Vrms

FEMTO Messtechnik GmbH
Paul Lincke-Ufer 34
D-10999 Berlin · Germany
Tel.: +49 (0)30 – 4 46 93 86
Fax: +49 (0)30 – 4 46 93 88
e-mail: info@femto.de
http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH
Printed in Germany