


Variable Gain Low Frequency Voltage Amplifier

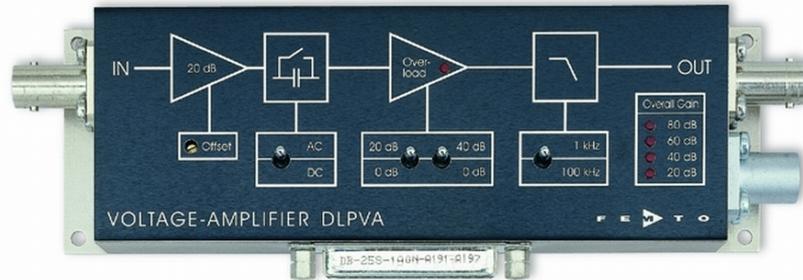

<p>Features</p>	<ul style="list-style-type: none"> • Variable Gain 20 to 80 dB, Switchable in 20 dB Steps • Bipolar Input Stage, Recommended for Low Impedance Sources Smaller than 1 kΩ • Single Ended and True Differential Input Models • Bandwidth DC - 100 kHz, Switchable to 1 kHz • 0.7 μV/°C DC-Drift • 120 dB CMRR • 2.4 nV/√Hz Input Noise • Switchable AC/DC-Coupling • Local and Remote Control
<p>Applications</p>	<ul style="list-style-type: none"> • Universal Laboratory Amplifier • Automated Measurements • Industrial Sensors • Detector Preamplifier • Integrated Measurement Systems
<p>Block Diagram</p>	<p style="text-align: right; font-size: small;">BS01-0440-19</p>



Variable Gain Low Frequency Voltage Amplifier

Specifications	<i>Test Conditions</i>	<i>V_s = ± 15 V, T_a = 25°C</i>		
Gain	Gain Values	20, 40, 60, 80 dB indicated by four LEDs		
	Gain Accuracy	± 0.1 %	(between settings)	
		± 1 %	(overall)	
Frequency Response	Gain Flatness	± 0.1 dB		
	Lower Cut-Off Frequency	DC, switchable to 1.5 Hz		
	Upper Cut-Off Frequency	100 kHz, switchable to 1 kHz		
Time Response	Upper Cut-Off Frequency Rolloff	12 dB/Oct.		
	Rise / Fall Time (10% - 90%)	3.5 μs (@ BW = 100 kHz) 350 μs (@ BW = 1 kHz)		
Input	Input Impedance	1 MΩ		
	Input Voltage Drift	0.7 μV/K		
	Equivalent Input Voltage Noise	Gain Setting	DLPVA-100-B-S	DLPVA-100-B-D
		60, 80 dB	2.4 nV/√Hz	3.6 nV/√Hz
		40 dB	6.4 nV/√Hz	7.3 nV/√Hz
		20 dB	60 nV/√Hz	60 nV/√Hz
	Equivalent Input Current Noise	2 pA/√Hz		
	1/f-Noise Corner	80 Hz		
	Input Bias Current	0.8 μA		
	Input Bias Current Drift	6 nA/°C		
Input Offset Voltage	± 4 mV, adjustable by offset trimmer and external control voltage			
Output	<i>True Differential Input, Model "DLPVA-100-B-D" only:</i>			
	Common Mode Voltage Range	± 9 V		
	CMRR	120 dB	(@ 100 Hz)	
		100 dB	(@ 10 kHz)	
		80 dB	(@ 60 kHz)	
	Output Impedance	50 Ω (terminate with > 10 kΩ for best performance)		
	Output Voltage Range for Linear Amplification	± 10 V (@ > 10 kΩ load)		
	Output Current (max.)	± 20 mA		
	Output Overload Recovery Time	0.5 ms (after 20x overload)		

Variable Gain Low Frequency Voltage Amplifier

Overload LED	<p>The amplifier features a LED to signalize an overload condition. The Overload LED will turn on if the signal level within the signal path exceeds the linear operating range. In order to ensure the correct operation of the amplifier without signal distortions reduce the gain setting until the Overload LED turns off.</p> <p>The Overload LED may also turn on under the following operating conditions:</p> <ul style="list-style-type: none"> - The amplifier is operated with open input or with a high source impedance. For proper operation please use a source impedance of less than 1 kΩ for model "B-S" and less than 10 kΩ for model "B-D", respectively, or switch to a lower gain setting. - When using a DLPVA-B-D with differential input stage the Overload LED may turn on if the common mode input voltage exceeds ± 5 V or if the source is totally floating with respect to the amplifier ground. For proper operation make sure that the common mode voltage stays within ± 5 V with respect to the amplifier ground and make a valid connection between the source ground and the amplifier ground to ensure that the inputs cannot drift outside the tolerable common mode range. 														
Remote Offset Control	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Offset Control Voltage Range</td> <td style="padding: 2px;">± 10 V, corresponds to ± 4 mV input offset</td> </tr> <tr> <td style="padding: 2px;">Offset Control Input Impedance</td> <td style="padding: 2px;">200 kΩ</td> </tr> </table>	Offset Control Voltage Range	± 10 V, corresponds to ± 4 mV input offset	Offset Control Input Impedance	200 k Ω										
Offset Control Voltage Range	± 10 V, corresponds to ± 4 mV input offset														
Offset Control Input Impedance	200 k Ω														
Remote Digital Control	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Control Input Voltage Range</td> <td style="padding: 2px;">Low: - 0.8 ... + 0.8 V High: + 1.8 ... + 12 V, TTL / CMOS compatible</td> </tr> <tr> <td style="padding: 2px;">Control Input Current</td> <td style="padding: 2px;">0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V</td> </tr> <tr> <td style="padding: 2px;">Overload Output</td> <td style="padding: 2px;">Non active: + 5 V, max. 1 mA, active: 0.8 V, max. -10 mA</td> </tr> </table>	Control Input Voltage Range	Low: - 0.8 ... + 0.8 V High: + 1.8 ... + 12 V, TTL / CMOS compatible	Control Input Current	0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V	Overload Output	Non active: + 5 V, max. 1 mA, active: 0.8 V, max. -10 mA								
Control Input Voltage Range	Low: - 0.8 ... + 0.8 V High: + 1.8 ... + 12 V, TTL / CMOS compatible														
Control Input Current	0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V														
Overload Output	Non active: + 5 V, max. 1 mA, active: 0.8 V, max. -10 mA														
Power Supply	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Supply Voltage</td> <td style="padding: 2px;">± 15 V (± 14.5 V to ± 16 V)</td> </tr> <tr> <td style="padding: 2px;">Supply Current</td> <td style="padding: 2px;">± 75 mA typ. (depends on operating conditions, recommended power supply capability minimum 150 mA)</td> </tr> </table>	Supply Voltage	± 15 V (± 14.5 V to ± 16 V)	Supply Current	± 75 mA typ. (depends on operating conditions, recommended power supply capability minimum 150 mA)										
Supply Voltage	± 15 V (± 14.5 V to ± 16 V)														
Supply Current	± 75 mA typ. (depends on operating conditions, recommended power supply capability minimum 150 mA)														
Case	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Weight</td> <td style="padding: 2px;">0.32 kg (0.7 lbs)</td> </tr> <tr> <td style="padding: 2px;">Material</td> <td style="padding: 2px;">AlMg4.5Mn, nickel-plated</td> </tr> </table>	Weight	0.32 kg (0.7 lbs)	Material	AlMg4.5Mn, nickel-plated										
Weight	0.32 kg (0.7 lbs)														
Material	AlMg4.5Mn, nickel-plated														
Temperature Range	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Storage Temperature</td> <td style="padding: 2px;">- 40 $^{\circ}$C to + 100 $^{\circ}$C</td> </tr> <tr> <td style="padding: 2px;">Operating Temperature</td> <td style="padding: 2px;">0 $^{\circ}$C to + 60 $^{\circ}$C</td> </tr> </table>	Storage Temperature	- 40 $^{\circ}$ C to + 100 $^{\circ}$ C	Operating Temperature	0 $^{\circ}$ C to + 60 $^{\circ}$ C										
Storage Temperature	- 40 $^{\circ}$ C to + 100 $^{\circ}$ C														
Operating Temperature	0 $^{\circ}$ C to + 60 $^{\circ}$ C														
Absolute Maximum Ratings	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Power Supply Voltage</td> <td style="padding: 2px;">± 21 V</td> </tr> <tr> <td style="padding: 2px;">Control Input Voltage</td> <td style="padding: 2px;">+ 16 V / - 5 V</td> </tr> <tr> <td colspan="2" style="padding: 5px 0 0 20px;"><i>Single Ended Input, Model "DLPVA-100-B-S" only:</i></td> </tr> <tr> <td style="padding: 2px;">Signal Input Voltage</td> <td style="padding: 2px;">± 4.5 V</td> </tr> <tr> <td colspan="2" style="padding: 5px 0 0 20px;"><i>True Differential Input, Model "DLPVA-100-B-D" only:</i></td> </tr> <tr> <td style="padding: 2px;">Signal Input Differential Voltage</td> <td style="padding: 2px;">± 7.7 V</td> </tr> <tr> <td style="padding: 2px;">Signal Input Com. Mode Voltage</td> <td style="padding: 2px;">± 12 V</td> </tr> </table>	Power Supply Voltage	± 21 V	Control Input Voltage	+ 16 V / - 5 V	<i>Single Ended Input, Model "DLPVA-100-B-S" only:</i>		Signal Input Voltage	± 4.5 V	<i>True Differential Input, Model "DLPVA-100-B-D" only:</i>		Signal Input Differential Voltage	± 7.7 V	Signal Input Com. Mode Voltage	± 12 V
Power Supply Voltage	± 21 V														
Control Input Voltage	+ 16 V / - 5 V														
<i>Single Ended Input, Model "DLPVA-100-B-S" only:</i>															
Signal Input Voltage	± 4.5 V														
<i>True Differential Input, Model "DLPVA-100-B-D" only:</i>															
Signal Input Differential Voltage	± 7.7 V														
Signal Input Com. Mode Voltage	± 12 V														

Variable Gain Low Frequency Voltage Amplifier


Connectors	Input	<p><i>Single Ended Input, Model "DLPVA-100-B-S":</i> BNC</p> <p><i>True Differential Input, Model "DLPVA-100-B-D":</i> LEMO series 1S, 4-pin fixed socket</p> <p>Pin 1: non inverting input Pin 2: inverting input Pin 3: GND Pin 4: N.C.</p> 
	Output	BNC
	Power Supply	<p>LEMO series 1S, 3-pin fixed socket</p> <p>Pin 1: + 15V Pin 2: - 15V Pin 3: GND</p> 
	Control Port	<p>Sub-D 25-pin, female, qual. class 2</p> <p>Pin 1: +12 V (stabilized power supply output, max. 100 mA) Pin 2: -12 V (stabilized power supply output, max. 100 mA) Pin 3: AGND (analog ground) Pin 4: +5 V (stabilized power supply output, max. 50 mA) Pin 5: digital output: overload Pin 6: NC Pin 7: NC Pin 8: offset control voltage input Pin 9: DGND (ground f. digital control Pin 10 - 25) Pin 10: NC Pin 11: digital control input: gain, LSB Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: 100 kHz / 1 kHz Pin 15 - 25: NC</p>

Variable Gain Low Frequency Voltage Amplifier

Remote Control Operation	<p>General</p> <p>Remote control input bits are opto-isolated and connected by logical OR to local switch setting. For remote control a switch setting, set the corresponding local switch to "0 dB", "AC" and "1 kHz" and select the wanted setting via a bit-code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled bandwidth setting, is also possible.</p>															
Gain Setting	<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="border-bottom: 1px solid black;">Gain</th> <th style="border-bottom: 1px solid black;">Pin 11</th> <th style="border-bottom: 1px solid black;">Pin 12</th> </tr> </thead> <tbody> <tr> <td>20 dB</td> <td>low</td> <td>low</td> </tr> <tr> <td>40 dB</td> <td>high</td> <td>low</td> </tr> <tr> <td>60 dB</td> <td>low</td> <td>high</td> </tr> <tr> <td>80 dB</td> <td>high</td> <td>high</td> </tr> </tbody> </table>	Gain	Pin 11	Pin 12	20 dB	low	low	40 dB	high	low	60 dB	low	high	80 dB	high	high
Gain	Pin 11	Pin 12														
20 dB	low	low														
40 dB	high	low														
60 dB	low	high														
80 dB	high	high														
AC/DC Setting	<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="border-bottom: 1px solid black;">Coupling</th> <th style="border-bottom: 1px solid black;">Pin 13</th> </tr> </thead> <tbody> <tr> <td>AC</td> <td>low</td> </tr> <tr> <td>DC</td> <td>high</td> </tr> </tbody> </table>	Coupling	Pin 13	AC	low	DC	high									
Coupling	Pin 13															
AC	low															
DC	high															
Bandwidth Setting	<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="border-bottom: 1px solid black;">Bandwidth</th> <th style="border-bottom: 1px solid black;">Pin 14</th> </tr> </thead> <tbody> <tr> <td>1 kHz</td> <td>low</td> </tr> <tr> <td>100 kHz</td> <td>high</td> </tr> </tbody> </table>	Bandwidth	Pin 14	1 kHz	low	100 kHz	high									
Bandwidth	Pin 14															
1 kHz	low															
100 kHz	high															

Typical Performance Characteristics

Frequency Response (Logarithmic)

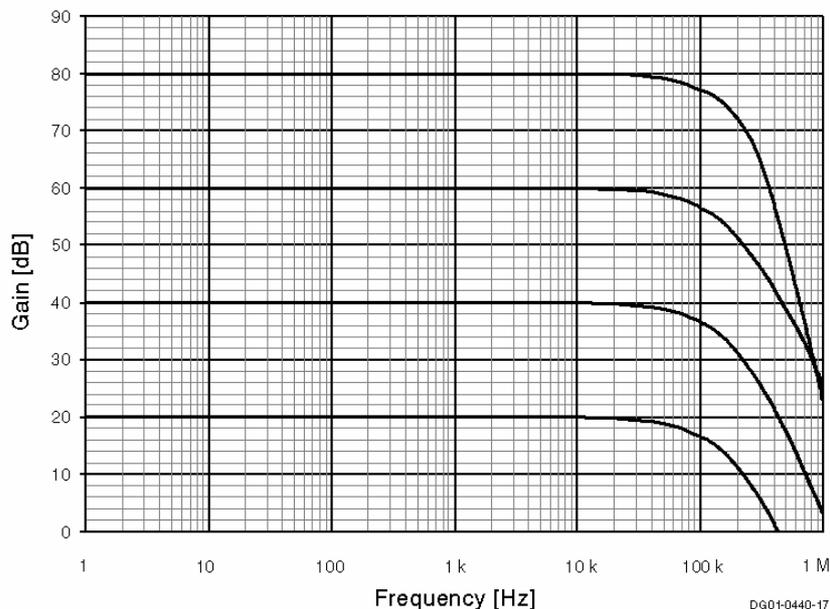

DG01-0440-17

Variable Gain Low Frequency Voltage Amplifier

<p>Dimensions</p>	
<p>Ordering Information</p>	<p>Available Models</p> <p>Model No.: DLPVA-100-B-S - Bipolar, single-ended input (BNC-connector input)</p> <p>Model No.: DLPVA-100-B-D - Bipolar, true differential input (LEMO-connector input)</p>

FEMTO Messtechnik GmbH
 Paul-Lincke-Ufer 34
 D-10999 Berlin • Germany
 Tel.: +49 (0)30 – 4 46 93 86
 Fax: +49 (0)30 – 4 46 93 88
 e-mail: info@femto.de
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
 © by FEMTO Messtechnik GmbH
 Printed in Germany