


2.2 GHz High-Speed Amplifier

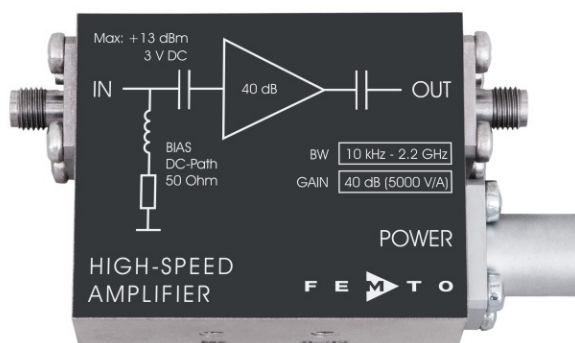

<p>Features</p>	<ul style="list-style-type: none"> • Bandwidth 10 kHz ... 2.2 GHz • Rise time 160 ps • Gain 40 dB • Integrated bias circuit 		
<p>Applications</p>	<ul style="list-style-type: none"> • Preamplifier for ultra-fast detectors (microchannel-plates, photomultipliers, avalanche-photodiodes and PIN-photodiodes) • Oscilloscope and transient-recorder preamplifier • Time-resolved pulse and transient measurements 		
<p>Block Diagram</p>			
<p>Specifications</p>	<p>Test conditions</p> <p>Gain</p> <p>Gain accuracy</p> <p>Frequency Response</p> <p>Input</p> <p>Output</p>	<p>$V_s = +15\text{ V}$, $T_A = 25^\circ\text{C}$, System Impedance = $50\ \Omega$</p> <p>40 dB</p> <p>$\pm 1\text{ dB}$</p> <p>Lower cut-off frequency (-3 dB) 10 kHz ($\pm 20\%$)</p> <p>Upper cut-off frequency (-3 dB) 2.2 GHz ($\pm 15\%$)</p> <p>Rise/fall time (10% - 90%) 160 ps</p> <p>DC input impedance 50 Ω</p> <p>RF input impedance 50 Ω</p> <p>50 Ω noise figure 5.1 dB (@ $f < 1\text{ GHz}$)</p> <p>Equivalent input voltage noise 670 pV/$\sqrt{\text{Hz}}$</p> <p>Input VSWR 1.5 : 1 (@ $f < 2.5\text{ GHz}$)</p> <p>Input return loss 14 dB (@ $f < 2.5\text{ GHz}$)</p> <p>Output impedance 50 Ω</p> <p>Output power $P_{1\text{dB}}$ +12.5 dBm (@ $f < 1\text{ GHz}$)</p> <p>Output peak-to-peak voltage 2.0 V_{pp} (@ $f < 500\text{ MHz}$, for linear amplification)</p>	


2.2 GHz High-Speed Amplifier

Specifications (continued)

Power Supply	Supply voltage	+15 V
	Supply current	+140 mA
Case	Weight	100 g (0.23 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature	-40 ... +100 °C
	Operating ambient temperature	0 ... +60 °C

Absolute Maximum Ratings	Power supply voltage	+18.5 V
	DC and LF input voltage	±3 V
	RF input power	+13 dBm

Connectors	Input	SMA, jack (female)
	Output	SMA, jack (female)
	Power supply	Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52) Pin 1: +15 V Pin 2: NC Pin 3: GND

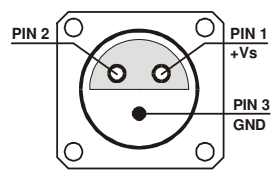

Dimensions	
------------	--

DZ01-0601-10

FEMTO Messtechnik GmbH
 Klosterstr. 64
 10179 Berlin · Germany
 Phone: +49 30 280 4711-0
 Fax: +49 30 280 4711-11
 Email: info@femto.de
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
 © by FEMTO Messtechnik GmbH · Printed in Germany